




UNLIMITED BONDING POSSIBILITIES

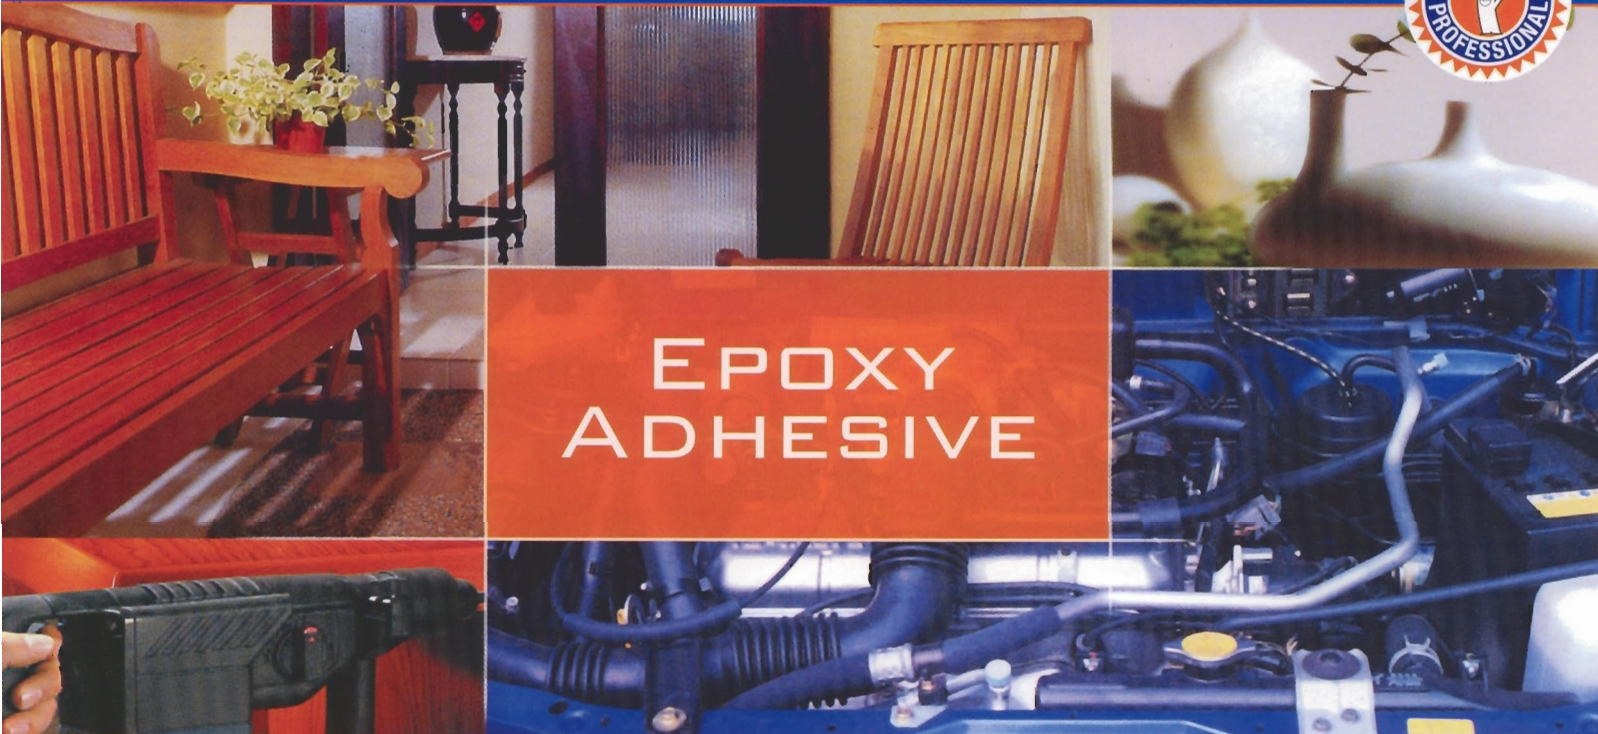

EPOXY ADHESIVE

KEEP OUT OF REACH OF CHILDREN

<p>Rapid Steel Epoxy</p> <p>4 Minutes</p> <p>Grey Color</p> <p>Steel Filled</p> <p>Excellent Gap Filling Oil & Chemical Resistance</p> <p>56.8gm (2oz.) Product Code: VT-140</p>	<p>Rapid 3 Ton Epoxy</p> <p>4 Minutes</p> <p>Clear Color</p> <p>Bond Most Materials Oil & Chemical Resistance</p> <p>36gm (1.27oz.) Product Code: VT-141</p>	<p>Vital Steel Epoxy</p> <p>30 Minutes</p> <p>Grey Color</p> <p>Steel Filled</p> <p>Excellent Gap Filling Longer Working Time</p> <p>56.8gm (2oz.) Product Code: VT-142</p>	<p>Vital 3 Ton Epoxy</p> <p>30 Minutes</p> <p>Clear Color</p> <p>Bond Most Materials Longer Working Time</p> <p>32gm (1.13oz.) Product Code: VT-143</p>
---	---	--	--

Manufactured and Packaged for Vital Technical, LLC, Pasadena, California 91101, USA. www.vitaltechnical.com

KEEP OUT OF REACH OF CHILDREN

RAPID STEEL EPOXY

4 Minutes

Grey Color

Steel Filled

Excellent Gap Filling
Oil & Chemical Resistance

20gm (0.70oz.)
Product Code: VT-144

Manufactured and Packaged for Vital Technical, LLC, Pasadena, California 91101, USA. www.vitaltechnical.com

V-tech Epoxy Adhesive

Excellent Bonding
Oil, Chemical & Heat Resistance
Non Shrinking

1 Litre

A Resin

V-tech Epoxy Adhesive

Excellent Bonding
Oil, Chemical & Heat Resistance
Non Shrinking

1 Litre

B Hardener

EPOXY ADHESIVE



Mini Pack



VT-141 Rapid 3 Ton 4 MINUTES Epoxy

Description:
Rapid 3 Ton 4 Minutes Epoxy is a fast setting, non-shrinking, clear color epoxy adhesive that exhibit a remarkable combination of properties, high mechanical strength, excellent resistant to most chemical and reliable heat resistant. It is easy to machine, non-conductive and can be handled after 2 hours.

Applications: Bond metal, wood, plastic, china, ceramics, brick, tools, glassware, fiberglass repair etc.

VT-140 / VT-144 Rapid Steel 4 MINUTES Epoxy

Description:
Rapid Steel 4 Minutes Epoxy is a fast setting, non-shrinking, grey colour epoxy adhesive that exhibit a remarkable combination of properties, high mechanical strength, excellent resistant to most chemical and reliable heat resistant. It is steel-filled hence offers good gap-filling capabilities and non-slumping characteristic. It is easy to machine, non-conductive and can be handled after 2 hours.

Applications: Bonding of metal and metal alloys, casting impregnating and potting system, gap filling, trimming bonding, crack casting or holes repair, tools, ornaments, knobs, ceramic, glassware, fiberglass repair etc.

Code No	Product Name	Packaging Size	Packaging Detail	
			Inner Box	Outer Carton
VT-140	Rapid Steel 4 Minutes Epoxy	56.8gm (2oz.)	12	144
VT-1401L	Rapid Steel Epoxy	1 Litre x 2/set	-	6 sets
VT-144	Rapid Steel Epoxy (Mini Pack)	20gm (0.70oz.)	24	288

Code No	Product Name	Packaging Size	Packaging Detail	
			Inner Box	Outer Carton
VT-141	Rapid 3 Ton 4 Minutes Epoxy	36gm (1.27oz.)	12	144
VT-1411L	Rapid 3 Ton Epoxy	1 Litre x 2/set	-	6 sets



VT-142 Vital Steel Epoxy

Description:
Vital Steel Epoxy is a grey color epoxy adhesive formulated to give longer working time (60 minutes) for large assembly with many components. It is steel-filled hence offers good gap-filling capabilities and non-slumping characteristic. It exhibits a remarkable combination of properties, high mechanical strength, excellence resistant to most chemical and reliable heat resistant. It is easy to machine and non-conductive.

Applications : Bonding of metal and metal alloys, casting impregnating and potting system, gap filling, rimming bonding, crack casting or holes repair, tools, ornaments, knobs, ceramic, glassware, fiberglass repair etc.

Code No	Product Name	Packaging Size	Packaging Detail	
			Inner Box	Outer Carton
VT-142	Vital Steel Epoxy	56.8gm (2oz.)	12	144
VT-1421L	Vital Steel Epoxy	1 Litre x 2/set	-	6 sets



VT-143 Vital 3 Ton Epoxy

Description:
Vital 3 Ton Epoxy is a clear color epoxy adhesive formulated to give longer working time (30 minutes) for large assembly with many components. It is the original heavy duty epoxy that suitable for most conditions. It exhibits a remarkable combination of properties, high mechanical strength, excellence resistant to most chemical and reliable heat resistant. It is easy to machine and non-conductive.

Applications: Bond metal, wood, plastic, china, ceramics, brick, concrete, masonry, tools, glassware, fiberglass repair etc.

Code No	Product Name	Packaging Size	Packaging Detail	
			Inner Box	Outer Carton
VT-143	Vital 3 Ton Epoxy	32gm (1.13oz.)	12	144
VT-1431L	Vital 3 Ton Epoxy	1 Litre x 2/set	-	6 sets

V-tech™ is the registered trademark of Vital Technical, LLC



Manufactured and Packed for
Vital Technical, LLC
Pasadena, California 91101, USA.
email: sales@vitaltechnical.com www.vitaltechnical.com

Distributed by: